

LITHIUM IRON PHOSPHATE (LiFePO4) BATTERY

ME Series


2.56~16.384KWH | WIFI

The ME Series offers a versatile and reliable power solution. Combine up to 40 units for energy capacities ranging from 2560Wh to 15360Wh. With WiFi Remote Monitoring, stay connected and in control. Whether it's wall-mounted convenience, stacked-mounting (up to 5 units) for space efficiency, or rack-mounted for industrial power management, this series offers seamless adaptability.



- 3-in-1: Wall-mounted, Stacked-mounted, Rack-mounted(optional)
- Vertical-mounted only for ME51300 & ME51320
- Large capacity, high power output
- Safest lithium iron phosphate battery cell with high energy density
- Modular design: supports up to 40 units in parallel
- Support CAN & RS485 communication with mainstream inverters
- Local monitoring via LCD monitor
- Built-in WiFi Smart BMS Module

Back panel description

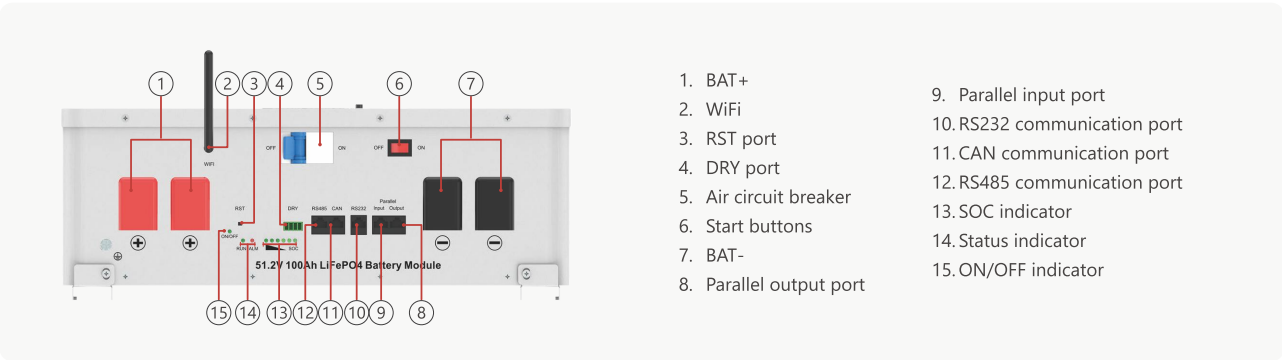

Installation method



Technical Data		ME25100	ME25200	ME25300	ME51100	ME51200	ME51300	ME51320
Nominal Voltage		25.6V			51.2V			
Nominal Capacity		100Ah	200Ah	300Ah	100Ah	200Ah	300Ah	320Ah
Nominal energy		2560Wh	5120Wh	7680Wh	5120Wh	10240Wh	15360Wh	16384Wh
Max. output power		2.5KW	3.5KW	5KW	5KW	7.5KW	10KW	7.5KW
Life Cycles		6000 cycles @ 80% DOD, 25°C						
Recommended Charge Voltage		29.2V			58.4V			
Recommended Charge Current		20A	40A	60A	20A	40A	60A	60A
End Of Discharge Voltage		22V			44V			
Standard Method	Charge	20A	40A	60A	20A	40A	60A	60A
	Discharge	50A	100A	150A	50A	100A	150A	100A
Maximum Continuous Current	Charge	100A	150A	200A	100A	150A	200A	150A
	Discharge	100A	150A	200A	100A	150A	200A	150A
BMS Cut-Off Voltage	Charge	29.2 V (3.65V/Cell)			58.4 V (3.65V/Cell)			
	Discharge	22.0V (2s) (2.75V/Cell)			44.0V (2.75V/Cell)			
Temperature	Charge	0~50°C						
	Discharge	-20~60°C						
Storage Temperature		-5~35°C						
Shipment Voltage		≥25.6V			≥51.2V			
Safety Function		Over-charge, Over-discharge, Over-current, Low/High-temperature, Short-circuit Protections						
Module Parallel		Up to 40 units						
Communication		CAN2.0/RS232/RS485						
IP Protection level		IP21						
Case Material		SPCC						
Installation Mode		Wall-mounted, Stacked-mounted, Rack-mounted(optional)					Vertical-mounted	
Machine Dimension (W*H*D) (mm)		442*485.5*177	442*486.5*250	442*495*230	442*625.5*177	442*686.5*250	490*923*265	
Package Dimension (W*H*D) (mm)	carton box	557*227*547	557*300*547	/	688*227*557	non	/	
	wooden box	555*340*565	555*410*565	600*570*405	700*570*350	759*405*569	1000*450*565	
N.W (kg)		27	44	68	45	80	117	
G.W (kg)	carton box	30	48	/	48	non	/	
	wooden box	40	57	85	58	97	137	
* Variations in dimensions and weights may occur due to production batches.								
Charge Retention And Capacity Recovery Capability		Standard charge the battery, and then put aside at room temperature for 28d or 55°C for 7d, Charge retention rate≥90%, Recovery rate of charge≥90%						
Warranty		5 years						
Certification & Standards		CE-EMC (EN 61000-6-3: 2007+A1: 2011+AC: 2012 EN IEC 61000-6-1: 2019) IEC62619-1:2018; IEC62619:2022; IEC62619:2017; UN38.3/ MSDS						

*The technical specifications of this document are subject to change without any notice